

EPOSIR[®] 7106

PRODUCT DATA
SHEET
REM/7106/011901/1

Description

Monofunctional reactive aliphatic diluent C12 - C14 alkyl glycidyl ether.

Applications

Reactive diluent in epoxy resin systems.

Sales specification

Property	Value	Unit	Method
Epoxy equivalent weight	290 - 340	g.	ISO 3001
Viscosity at 25°C	7 - 15	mPa.s.	ASTM D 0445
Colour	1 max	Gardner Sc.	ASTM D 1544

Typical Properties

Property	Value	Unit	Method
Density at 25°C	0.89	g/cm ³	ASTM D 1475

Supply Form

- Drums 180 Kg – IBC 1 MT - Bulk.

Storage stability

The product should be stored in the original containers, in dry ambient, protected against light and direct sun-rays, at temperature ranging from 15 to 30°C. In these conditions it is stable for one year.

Safety

For professional and industrial use only. Before using the material, it is recommended to follow the industrial hygiene procedures and safety instructions by consulting the corresponding product safety data sheet.

Eposir[®]: SIR INDUSTRIALE registered trade mark.

N.B.: The data given in this brochure do not constitute characteristic properties of the single product.


To our best knowledge, the information contained in this brochure is accurate and corresponds to the truth.

However, any recommendations or suggestions are provided without any guarantee, since the conditions in which the products are used are not under our control. Furthermore, nothing contained in this brochure shall be interpreted as a recommendation for using the product in violation of any patents relating to the material and their uses.

Application Characteristics

Eposir 7106 gives flexibility to epoxy products. Mixed together with Eposir 7120 exerts a high viscosity cutting power in the epoxy part of the formulation.

In the following graphic it is reported the viscosity trend measured at 25°C vs. the quantity of Eposir 7106 blended with Eposir 7120.

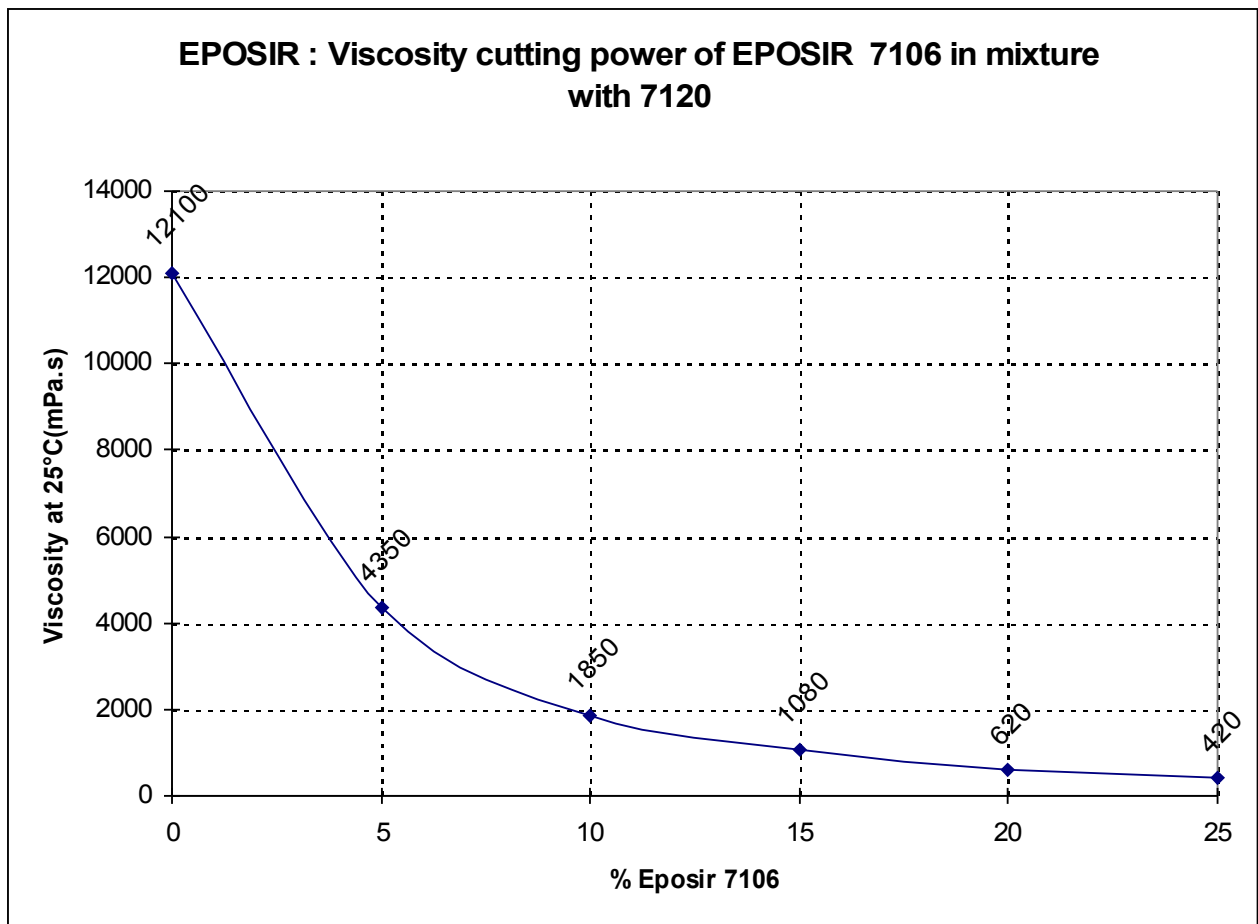

Eposir®: SIR INDUSTRIALE registered trade mark.

N.B.: The data given in this brochure do not constitute characteristic properties of the single product.

To our best knowledge, the information contained in this brochure is accurate and corresponds to the truth.

However, any recommendations or suggestions are provided without any guarantee, since the conditions in which the products are used are not under our control. Furthermore, nothing contained in this brochure shall be interpreted as a recommendation for using the product in violation of any patents relating to the material and their uses.