





# SIRALES<sup>®</sup> PE 7499

PRODUCT  
DATA SHEET  
RS/7499/011402/2

Accelerated weathering test : Q Panel UV 313B.

Formulation:	pbw
Polyester resin	618
Prosid 411	32
Byk 360/P	12
Benzoin	4
Brown Pigments	50
Barium Sulphate	300

Curing cycle: 15 minutes at 180°C

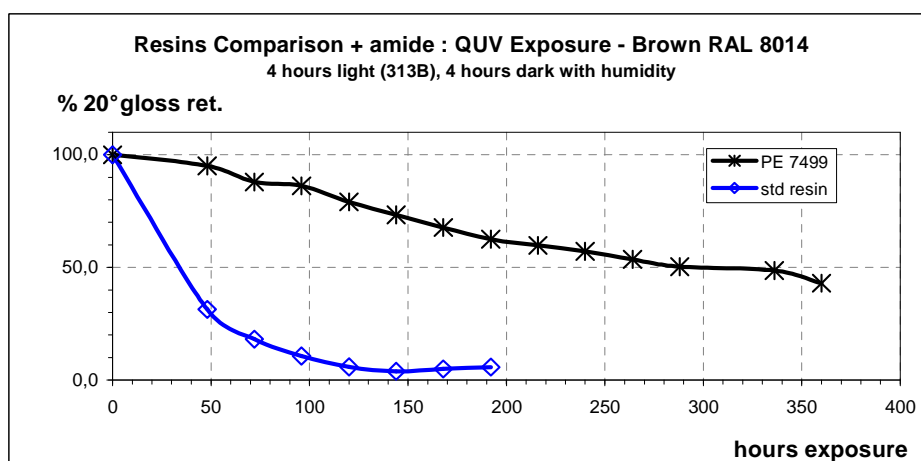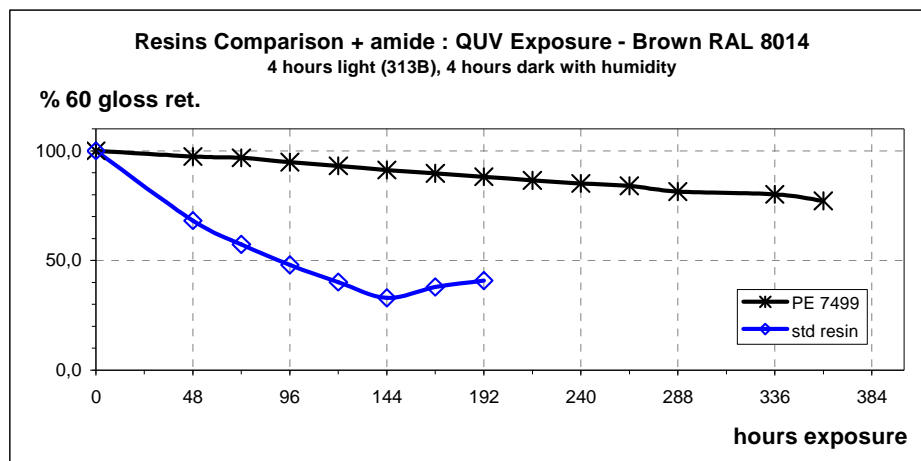

SIRALES<sup>®</sup>: SIR INDUSTRIALE registered trade mark.

N.B.: The data given in this brochure do not constitute characteristic properties of the single product.

To our best knowledge, the information contained in this brochure is accurate and corresponds to the truth.

However, any recommendations or suggestions are provided without any guarantee, since the conditions in which the products are used are not under our control. Furthermore, nothing contained in this brochure shall be interpreted as a recommendation for using the product in violation of any patents relating to the material and their uses.